

AC axial fan


S series



- **Design:** Basket guard grille
- **Impeller material:** Sheet steel (enameled in black)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Voltage	Frequency	Air flow	Speed	Power consumption	Current draw	Sound pressure level	Operative range 50Hz	Weight
Type	Motor	3~ VAC	Hz	m³/h	1/min	W	A	dB(A)	Pa	kg
S4D450AP0101	M4D074GA	230/400	50	5440	1380	200	0.48	72	0 .. 120	5.0
Subject to modification		Current draw measured at 400 VAC (Y)								

Characteristic: Pressure over air flow at 50Hz	n [min-1]	P ₁ [W]	ntl [%]	Lpa [dBA]
--	--------------	-----------------------	------------	--------------

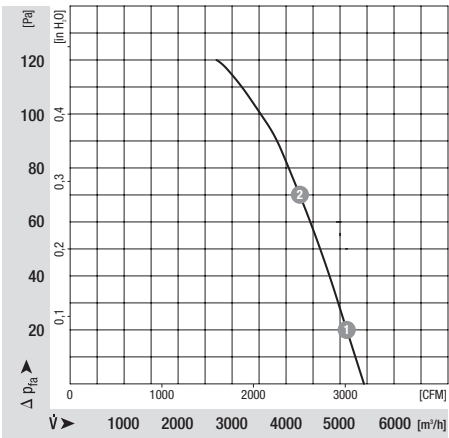


1	1360	220	--	--
2	1330	258	--	--


AC axial fan

S series

Specific drawing

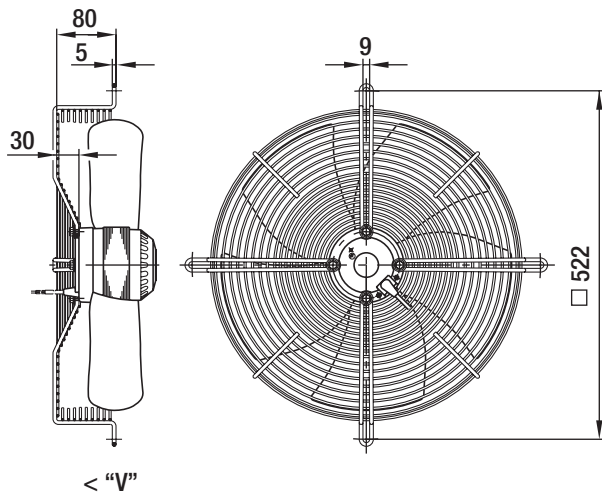

Connection illustration

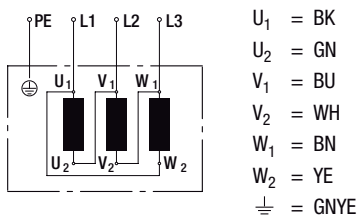

Technical description

- **Design:** Basket guard grille
- **Bearings:** Maintenance-free ball bearings
- **Direction of flow:** "V"
- **Cable layout:** Variable
- **Insulation class:** "F"
- **System of protection:** IP 44
- **Impeller material:** Sheet steel (enameled in black)
- **Direction of rotation:** Left, looking at rotor
- **Number of impeller blades:** 5
- **Operating mode:** S1
- **Protection class:** I
- **Option:** Available on request as 400 VAC (triangle/star) for 2 speed stages; with terminal box

Contact

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2
D-74673 Mulfingen
Phone +49 (0) 79 38 / 81-0
Fax +49 (0) 79 38 / 81-110
info1@de.ebmpapst.com
www.ebmpapst.com