

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344General partner: Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142**Nominal data**

Type	W3G300-CN02-30	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min ⁻¹	2050
Power input	W	170
Current draw	A	1.35
Max. back pressure	Pa	135
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2013	Request 2015
Installation category	A			
Efficiency category	Static			
Variable speed drive integrated	Integrated			
Specific ratio*	1,00			
Overall efficiency η_{es}		43,1	24,6	28,6
Efficiency grade N		54,5	36	40
Power input P_{ed}	kW	0,16		
Air flow q_v	m ³ /h	1795		
Pressure increase p_{fs}	Pa	128		
Speed n	min ⁻¹	2060		

Data established at point of optimum efficiency



Technical features


Size	300 mm
Material of blades	PP-GF40 plastic
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Cooling bore / aperture	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limit - Soft start - Over-temperature protected electronics / motor
Speed steps	2
Motor protection	PTC resistor
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)

EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille

Product drawing

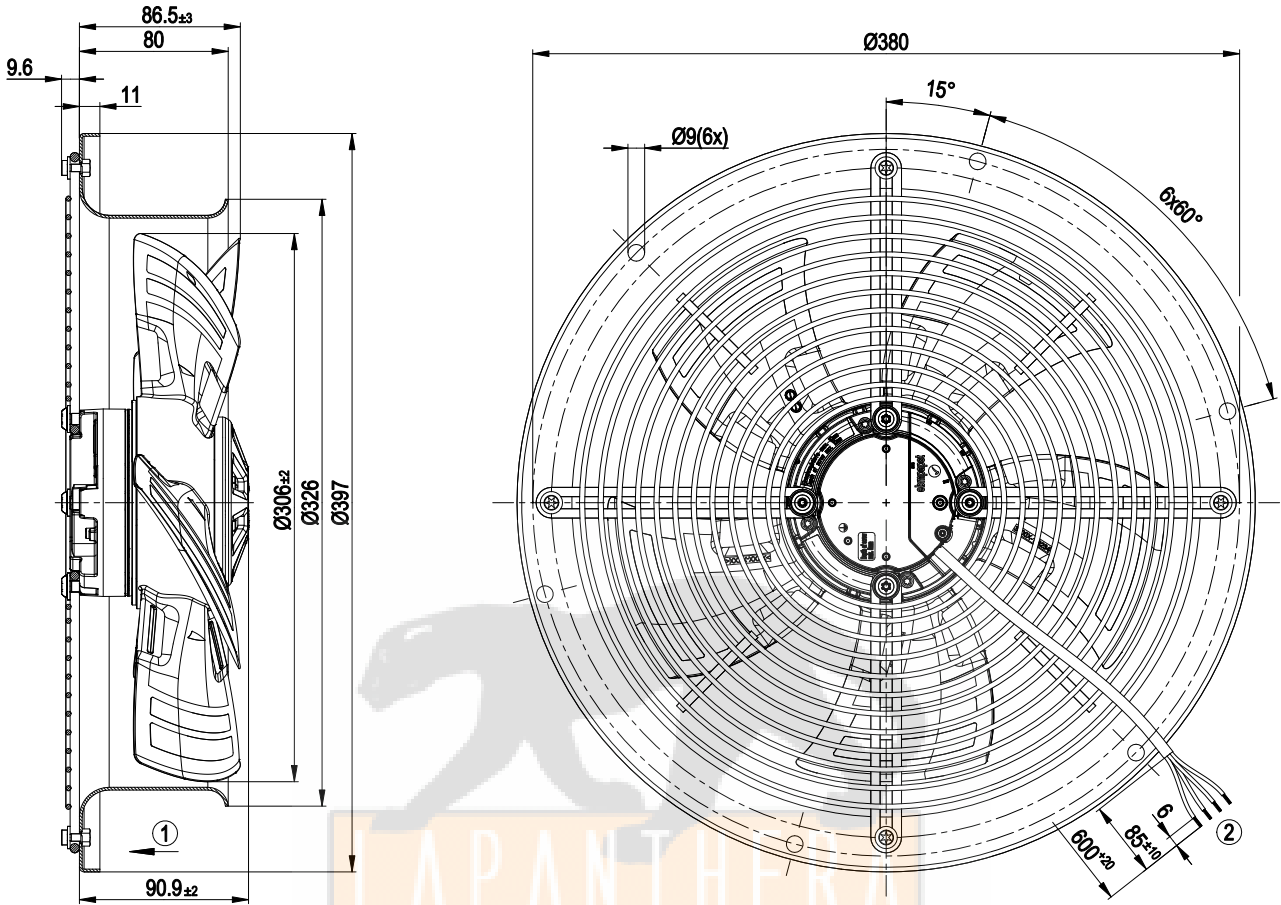

- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Connection line PVC 4G AWG20, 4x brass lead tips crimped |




EC axial fan - HyBlade®

sickled blades (S series)

Wall ring with guard grille


Connection screen

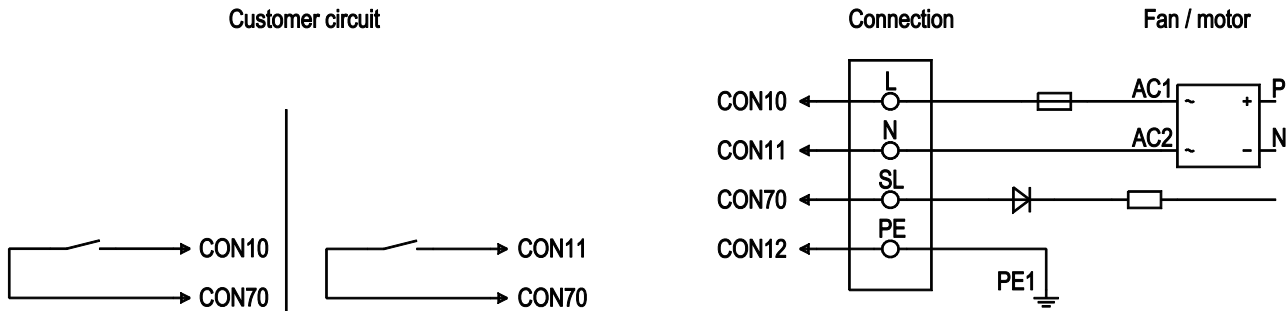

Line	No.	Signal	Colour	Function / assignment
	CON 10	L	black	Power supply 230 VAC, 50 - 60 Hz, see type plate for voltage range
	CON 11	N	blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth
	CON 70	SL	brown	Speed selection: switch open = speed 1; switch closed = speed 2



Charts: Air flow 50 Hz

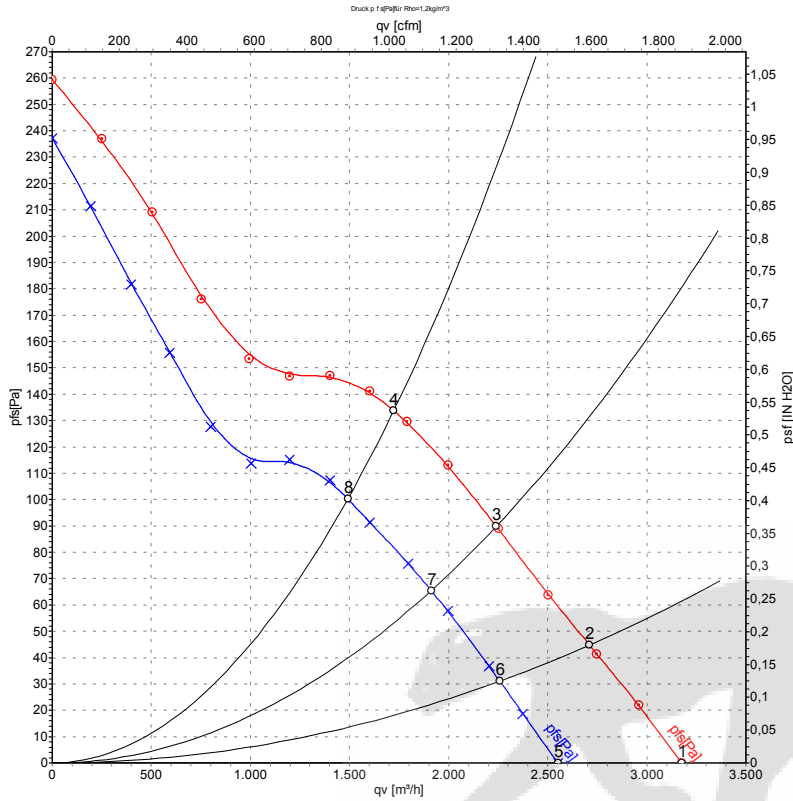

Measurement: LU-138597
Measurement: LU-138598

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	L _{pA_{in}}	L _{wA_{in}}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	230	50	2390	168	1.30	64	71	3175	0
2	230	50	2250	167	1.35	64	71	2710	45
3	230	50	2145	168	1.35	62	69	2240	90
4	230	50	2050	168	1.35	64	72	1725	135
5	230	50	1910	88	0.75	59	66	2550	0
6	230	50	1865	97	0.81	59	66	2260	31
7	230	50	1830	105	0.86	58	65	1910	66
8	230	50	1790	112	0.91	58	66	1490	100